
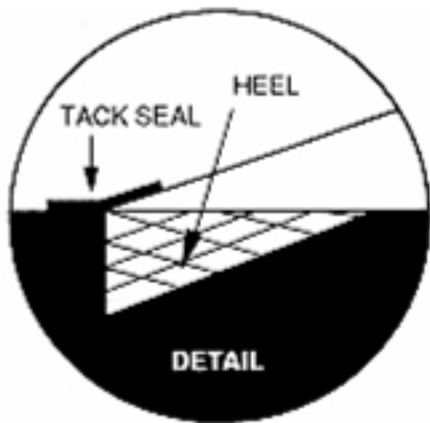


# Asphalt Surface Restoration

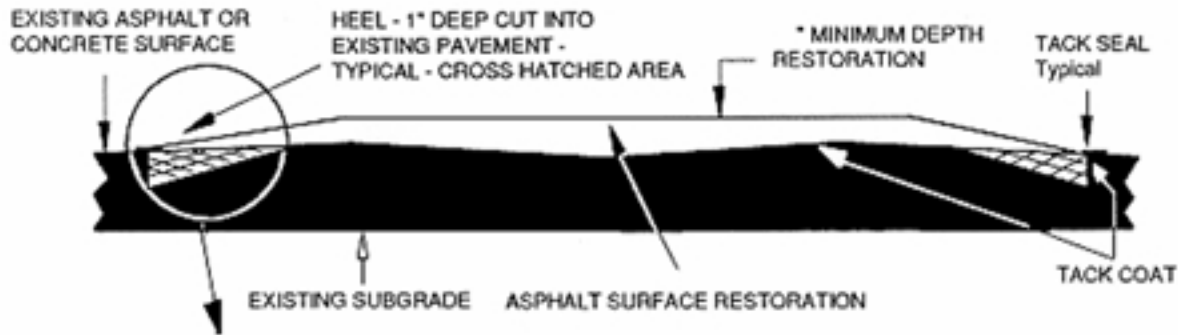

1. Lay out and mark all areas of repair.
2. Cut and heel around perimeter of area to be repaired with a 1" tailing depth at the butt end.
3. Clean repair area of vegetation, dirt and surface debris as required. Dispose of all debris offsite.
4. Mechanically apply liquid asphalt tack coat to complete area of surface repair.
5. Install 2" average minimum depth of hot mix asphalt surface course material.
6. Roll surface course to achieve a true and firm finish. Match existing grade at butt of heel.
7. Apply a seal of liquid asphalt to the adjoining edges of the finish repair to help prevent moisture penetration.

**NOTE:** Asphalt General is not responsible for ponding water or poor drainage in areas where grade is less than 2%.