
## www.MYpavementGUY.com

## Restoration of Existing Light Pole Base

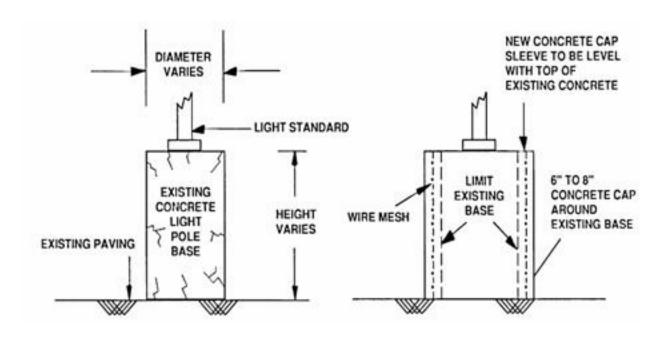

EXISTING BASE - DEFECTIVE CONCRETE

RESTORED CONCRETE BASE

- 1. Clean and remove loose defective concrete from bases.
- Install form of 12" to 16" greater in diameter than existing bases around base.
- 3. Reinforce with one layer of welded wire mesh.
- 4. Fill form with concrete and finish.
- Remove form after 15 days.

1414 Battery Avenue, Baltimore, MD 21230

Phone: 443-463-1536

Fax: 410-547-1799